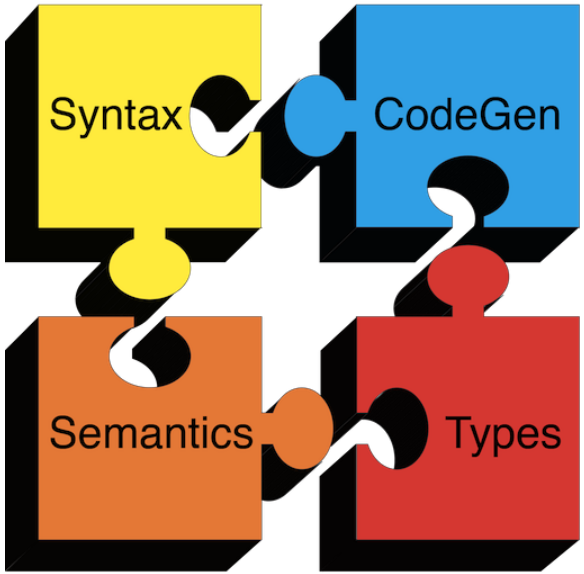

Compilers

Scope

Scope

- Matching identifier declarations with uses
  - Important static analysis step in most languages
  - Including COOL!

Scope

- Example 1

$$\text{let y: String} \leftarrow \text{“abc” in y + 3}$$

- Example 2

$$\text{let y: Int in x + 3}$$

Scope

- The *scope* of an identifier is the portion of a program in which that identifier is accessible
- The same identifier may refer to different things in different parts of the program
  - Different scopes for same name don't overlap
- An identifier may have restricted scope

Scope

- Most languages have *static* scope
  - Scope depends only on the program text, not run-time behavior
  - Cool has static scope

- A few languages are *dynamically* scoped
  - Lisp, SNOBOL
  - Lisp has changed to mostly static scoping
  - Scope depends on execution of the program

Scope

```
let x: Int <- 0 in
    {
        x;
        let x: Int <- 1 in
                x;
        x;
    }
```

Scope

- A dynamically-scoped variable refers to the closest enclosing binding in the execution of the program

- Example

  g(y) = let a ← 4 in f(3);

  f(x) = a;

- More about dynamic scope later . . .

Scope

- Cool identifier bindings are introduced by
  - Class declarations (introduce class names)
  - Method definitions (introduce method names)
  - Let expressions (introduce object id's)
  - Formal parameters (introduce object id's)
  - Attribute definitions (introduce object id's)
  - Case expressions (introduce object id's)

Scope

- Not all identifiers follow the most-closely nested rule
- For example, class definitions in Cool
  - Cannot be nested
  - Are *globally visible* throughout the program
- A class name can be used before it is defined

Scope

```
Class Foo {
    . . . let y: Bar in . . .
};

Class Bar {
    . . .
};
```

Scope

Attribute names are global within the class in which they are defined

```
Class Foo {
    f(): Int { a };
    a: Int ← 0;
}
```

Scope

- Method names have complex rules
- A method need not be defined in the class in which it is used, but in some parent class
- Methods may also be redefined (overridden)

Scope

Choose whether or not each variable use binds to the name on the given line

- ☐ Line 6 binds to line 2
- ☐ Line 9 binds to line 7
- ☐ Line 11 binds to line 2
- ☐ Line 11 binds to line 14

```
1   Class Foo {
2       f(x: Int): Int {
3           {
4               let x: Int <- 4 in {
6                   x;
7                   let x: Int <- 7 in
8                       x;
9                   x;
10              };
11              x;
12          };
13      };
14      x: Int <- 14;
15  }
```